

## ทดสอบ config Fritz Box

The screenshot shows the Fritz!Box 7390 web interface. The main navigation menu on the left includes Overview, Internet, Telephony, Home Network, WLAN, DECT, and System. The Overview page displays the following information:



- FRITZ!Box Fon WLAN 7390 (FRITZ!OS 05.51)
- Current power consumption: 39%
- Connections: Internet (connected since 28.09.2013, 16:19), Telephony (1 Telephone number enabled: +662)
- Interfaces: DSL (disabled), LAN (connected (LAN 1, LAN 3)), WLAN (enabled, secured), DECT (off), USB (1 Storage (remove))
- Calls (Today 3): 28. Sep. 16:46 0867196632, 28. Sep. 16:37 021065006, 28. Sep. 16:36 0867196632
- Network: aj-11

A browser window is open over the page showing the 'About FRITZ!OS' page. The page lists the FRITZ!OS version as 05.51 and the firmware version as 84.05.51. The page also includes a list of features and a 'Print Page' button.

ทดสอบจาก OS: 05.51 Firmware V. 84.05.51

The screenshot shows the Fritz!Box 7390 web interface. The main navigation menu on the left includes Overview, Internet, Telephony, Home Network, WLAN, DECT, and System. The Telephone Numbers page displays the following information:

- Telephone Numbers (Line Settings, Voice Transmission)
- On this page you can set up and edit your own telephone numbers.
- Table of Telephone Numbers:

Status	Telephone number	Connected Via	Provider	Preselection	
●	+6621079015	Internet	catnextgen.com	*121#	 

Buttons: Print List, **New Telephone Number**, Help

Configเบอร์โดยเลือกที่ Telephony>Telephone Number>New Telephone Number

ถ้าใช้ Register ได้ ตรง Status จะเป็นสีเขียวดังรูป

**FRITZ!Box 7390**

FRITZ!Box | FRITZ!NAS | MyFRITZ! | ?

**Overview**  
**Internet**  
**Telephony**  
 Calls  
 Answering Machine  
 Telephone Book  
 Alarm  
 Fax  
 Call Blocks  
 Call Diversion  
 Dialing Rules  
 Telephony Devices  
**Telephone Numbers**  
 Regional Options  
**Home Network**  
**WLAN**  
**DECT**  
**System**

**Edit telephone number**  
 Enter here the account information you received from your Internet telephony provider.

**Account Information**  
 Use Internet telephone number  
 Telephony provider: other provider  
 Internet Telephone Number: +6621079015  
 If you want a name to be displayed for a certain number when you receive a call, assign the number a display name. When you receive a call, the telephone will show the display name.  
 Display name: 021079015  
 User name: 6621079015@catnextgen.  
 Password: \*\*\*\*  
 Registrar: catnextgen.com  
 Proxy server: 202.129.61.102

**Settings**  
 The provider uses SIP trunking  
 Please set the country code on the "Telephone Numbers / Line Settings" page.

OK Cancel Help

ทดสอบจากเบอร์ Prepaid ใช้งานโทรเข้าโทรออกได้ดี การ config ตามรูปนะครับ

**FRITZ!Box 7390**

FRITZ!Box | FRITZ!NAS | MyFRITZ! | ?

**Overview**  
**Internet**  
**Telephony**  
 Calls  
 Answering Machine  
 Telephone Book  
 Alarm  
 Fax  
 Call Blocks  
 Call Diversion  
 Dialing Rules  
**Telephony Devices**  
 Telephone Numbers  
 Regional Options

**Telephony Devices**  
 On this page you can configure and edit the telephones, answering machines and fax machines connected to the FRITZ!Box.

Name	Connection	Telephone Number outgoing	Incoming	internal
Fax function	integrated	-	-	

Print List **Configure New Device** Help

การตั้ง Fritz Box ให้รับ Fax ไปเก็บใน Storage หรือ Forward เข้าอีเมลก็ทำได้นะครับ สามารถทำได้ดังนี้

เลือกที่ Telephony>Telephony Device>Configure New Device

**Configure Telephony Device**

What kind of telephony device would you like to configure?

**Connected to the FRITZ!Box**

You can connect various telephony devices to your FRITZ!Box: Telephones, answering machines, PBXs and fax machines.

Telephone (with or without answering machine)  
 Answering Machine  
 ISDN PBX  
 Fax machine

**Integrated in the FRITZ!Box**

Without having to connect a separate device, here you may configure up to five different answering machines and the fax function.

Answering machine  
 Fax function

Back Next Cancel

ถ้าต่อเครื่องFaxให้เลือก Fax Machine แต่กรณีนี้ไม่ได้ต่อเครื่องFax เลือกที่ Fax function แล้ว Next

**Settings for the fax function**

Specify which ID should be transmitted to the sender of the fax.

Fax ID: 021079015

Fax documents can be forwarded by e-mail and/or saved on a USB storage device.

Forward by e-mail to the e-mail address: anan.j@cattelecom.com

Define location

Do not save  
 Save internally  
 Save on the USB storage medium

Path: \FRITZfaxbox

Back Next Cancel

ใส่ Email ที่ต้องการให้ Forward เข้า และก็เลือกเก็บFaxไว้ที่ USB storage (ผมได้เสียบ Flash Drive ไว้กับ Fritz Box แล้ว) แล้ว Next

**Settings for the fax function**

Received faxes are sent from the following e-mail return address.

Name of sender: FRITZ!Box

E-mail return address: cat2call@hotmail.com

FRITZ!Box requires information about your mail account to send e-mail messages. The information required corresponds to the settings of your e-mail program. Contact your e-mail provider for more information.

Name of SMTP server: smtp.live.com

This server supports a secure connection (SSL)  
 E-mail user name

E-mail user name: ajantasing@hotmail.com

Enter a password if your SMTP server requires one to log on.  
 Password: \*\*\*\*

Here you can send an e-mail message containing the current connection and use information to test the e-mail forwarding. Test Settings

Back Next Cancel

ใส่ Name of SMTP server (ถ้าส่งจาก Hotmail คือ "smtp.live.com") และก็ Email Username / Password แล้ว Next


**Settings for the fax function**

Select the telephone numbers to be used to send and receive faxes.



No telephone numbers configured

Back Next Cancel

Next

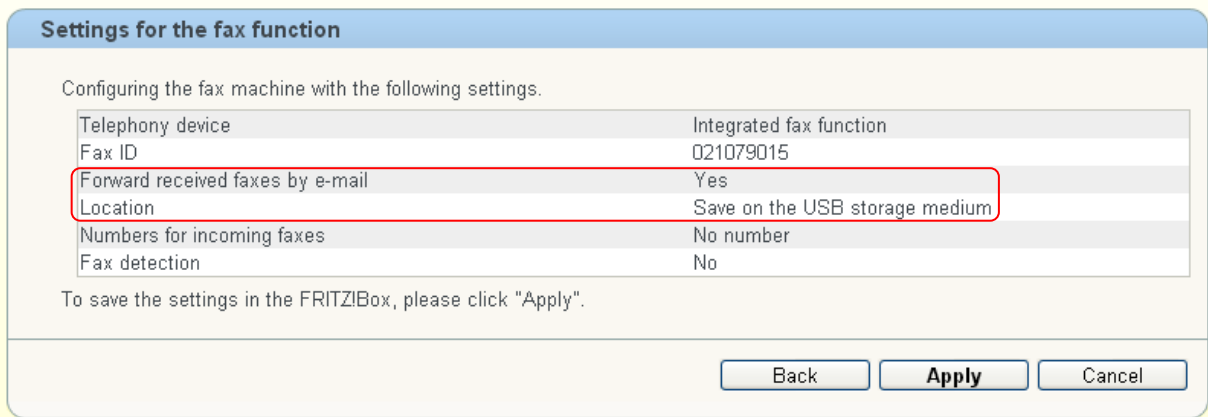

ระบบจะบอกสิ่งที่เราทำคือ Forward Faxes By e-mail และก็ Save on the USB แล้วก็ Apply ก็ถือว่าตั้งค่าเสร็จแล้ว

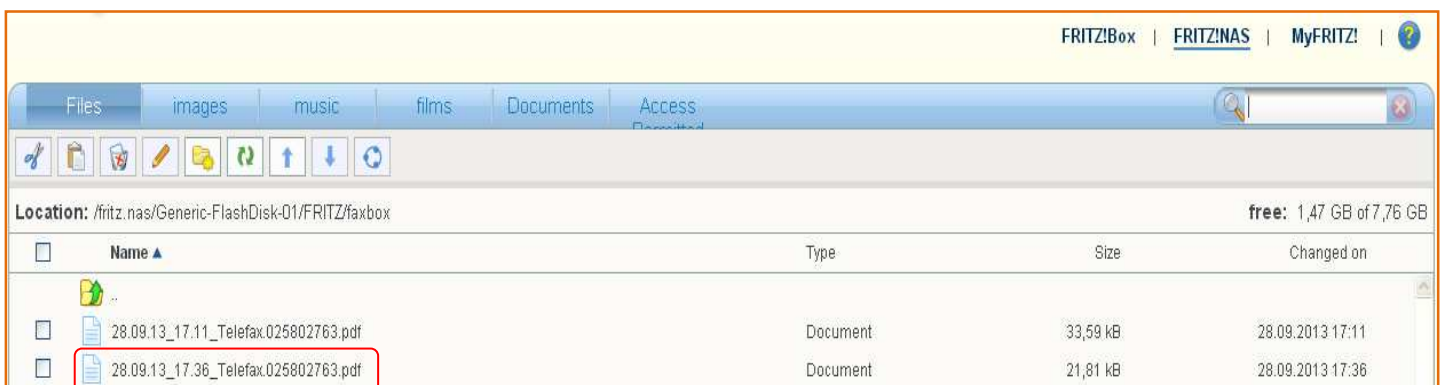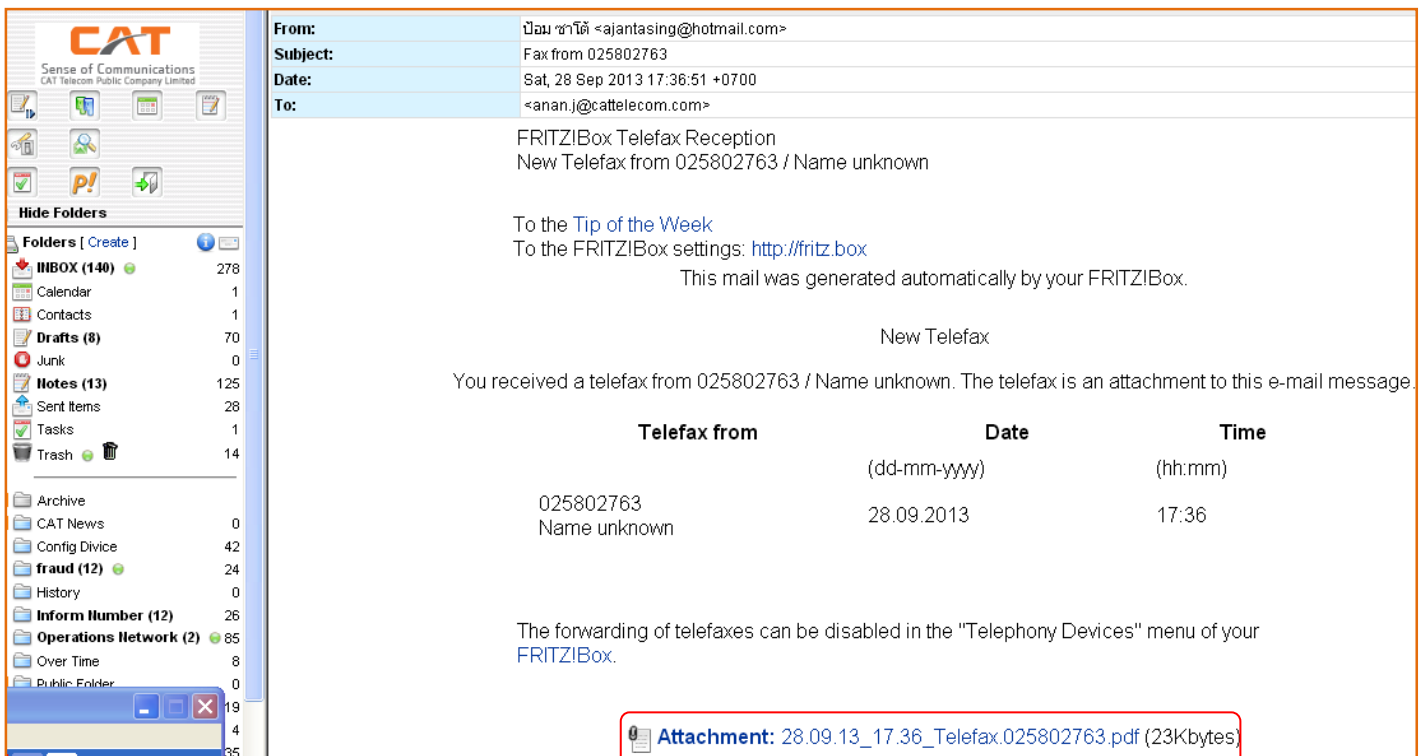

เมื่อFaxเข้าเบอร์ที่อยู่ที่ Fritz Box ก็จะได้รับแฟกซ์ที่ Email ที่เราตั้งค่าไว้และที่ USB storage ที่ Fritz!NAS ดังภาพครับ